



Simplex Patch Cords and Pigtails

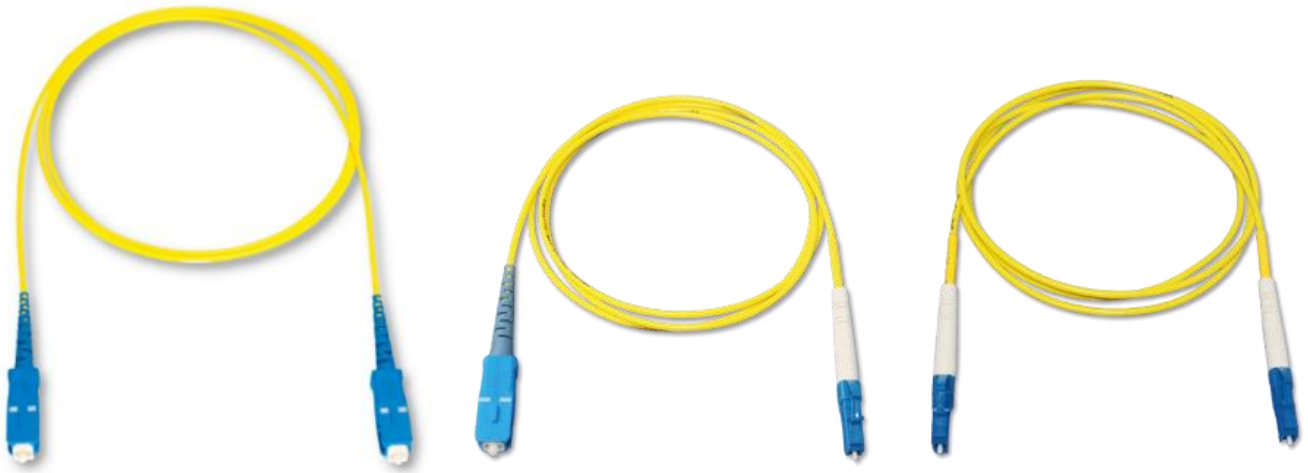

SC-SC

SC-LC

LC-LC

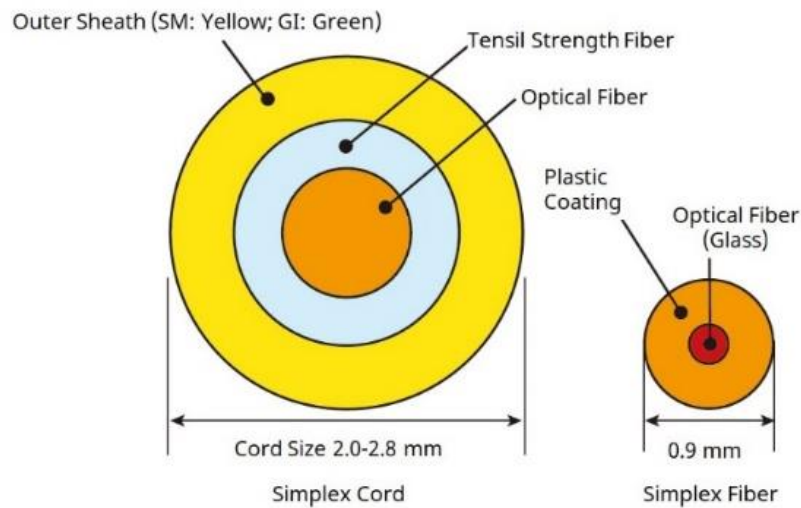

This product is a general Simplex Patch Code used for Optical Distribution Frame. The Simplex Fiber with connector is used for wiring in the optical equipment.

Features

- Applicable for SC, LC, MU and FC connector
- Applicable for SM fiber and MM fiber

Applications


- Wiring in the optical equipment for inside plant
- Wiring in the Optical Termination Enclosure and Optical Distribution Frame



Contact us

Ordering Information

Both End with Connectors

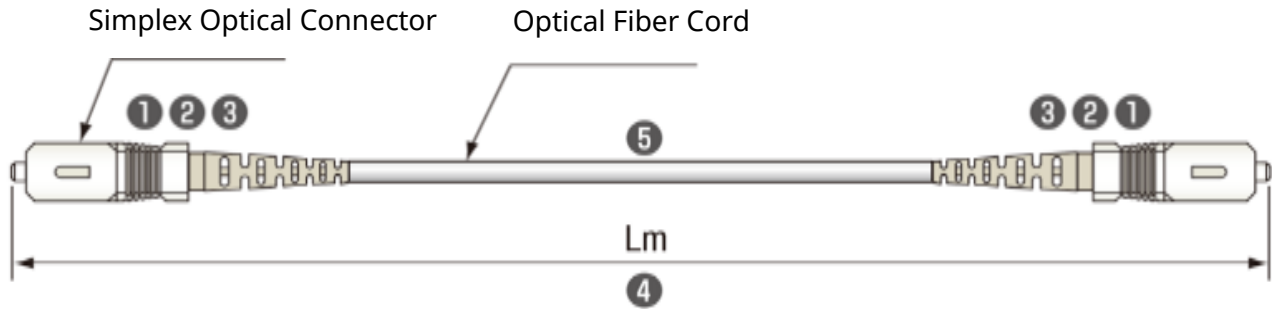

Model Number: FSC-2PS-SPC-3M-SMC10/125-S

① ② ③ ④ ⑤

①	②	③	④	⑤	
Connector Type (*1)	Connector at Fiber End	Polishing Type (*2)	Product Length (*3)	Fiber Type (*4)	
FSC: SC	Single Mode Fiber	PC: PC Polishing	Number in Metric (0.3 m or more)	Simplex Cord	Simplex Fiber
FSC2: SC2	1PS: One End Only	SPC: SPC Polishing		GC50/125-S: MM50 (Green), OM2	G50/125: MM50 (White), OM2
FLC: LC	2PS: Both Ends	UPC: UPC Polishing		GC62.5/125-S: MM62.5 (Green), OM1	SM10/125: SM (White), R30
FMU: MU	Multimode Fiber	APC: APC Polishing (SC, FC only)		SMC10/125-S: SM (Yellow), R30	SR15E-SM10/125: SM (White), R15
FMUJ: MUJ		1P: One End Only		SR15E-SMC10/125-S: SM (Yellow), R15	
FFC: FC		2P: Both Ends		GC50/125-S(10G): MM10G (Green), OM3	
FLC(TAB)					

(*1): When different connectors are attached at both ends, indicate FFC/FSC.

(*2): When polishing at both ends is different, indicate PC/SPC. Multimode fiber is PC polishing only.

(*3): Product length tolerances are shown below:

Product Length	Tolerance
$L \leq 1 \text{ m}$	+10 cm, -0
$1 \text{ m} < L \leq 10 \text{ m}$	+10%, -0
$10 \text{ m} < L \leq 50 \text{ m}$	+1 m, -0
$50 \text{ m} < L$	+2%, -0

(*4): For $\varnothing 0.9 \text{ mm}$ fiber and $\varnothing 2 \text{ mm}$ cord, color in () indicates coating color.



Contact us

Item	Model Number Example *	Standard Product Length (m)	Overview
1	FSC-2PS-SPC-LM-SMC10/125-S	L = 1, 2, 3, 5	SM (R30) Simplex Cord with SC Connectors at Both Ends
2	FSC-2PS-SPC-LM-SR15E-SMC10/125-S	L = 1, 2, 3, 5	SM (R15) Simplex Cord with SC connectors at Both Ends
3	FLC-2PS-SPC-LM-SR15E-SMC10/125-S	L = 1, 2, 3, 5	SM (R15) Simplex Cord with LC connectors at Both Ends
4	FSC-2P-PC-LM-GC50/125-S	L = 1, 2, 3, 5	GI 50/125 Simplex Cord with SC connectors at Both Ends
5	FSC-2P-PC-LM-GC62.5/125-S	-	GI 62.5/125 Simplex Cord with SC connectors at Both Ends
6	FSC/FLC-2P-PC-LM-GC50/125-S	-	GI 50/125 Simplex Cord with LC Connector at One End and SC Connector at Other End
7	FSC-1PS-SPC-LM-SR15E-SMC10/125-S	L = 1, 2, 3, 5	SM (R15) Simplex Cord with SC Connector at One End Only
8	FSC-2PS-SPC-LM-SM10/125	-	SM Simplex Fiber with SC Connectors at Both Ends
9	FSC-2P-PC-LM-G50/125	-	GI 50/125 Simplex Fiber with SC Connectors at Both Ends

* Specify the total length (m) for L



Contact us